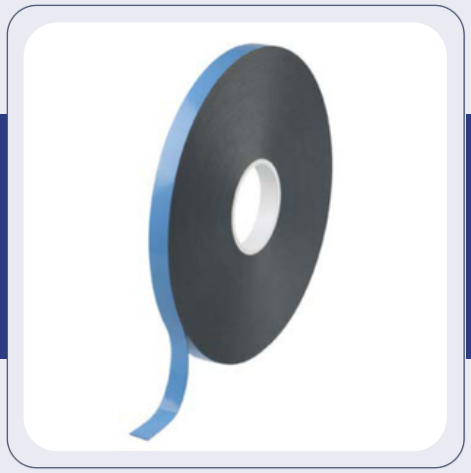


NORBOND

2134

DOUBLE COATED PE FOAM TAPE

PROTECT WHAT MATTERS

Previously known as **h-old® 2134 Double Coated PE Foam Tape, still produced by Saint-Gobain Performance Plastics h-old S.p.A.*

GENERAL DESCRIPTION

0,8 mm black, closed cells, medium density PE foam coated with a high performance acrylic adhesive system and protected by siliconized PP release liner. Intended for glazing applications, mounting and assembling of body side mouldings, emblems, mirrors, labels, etc. Plastic liner for easy removal.

FEATURES

- High initial tack and shear strength
- Excellent UV and ageing resistance

APPLICATIONS

- Mounting of plastic parts, body side mouldings and emblems in the automotive industry
- Mounting of decorative profiles in the furniture industry
- Assembling of double glazing in the building & construction industry

NORBOND® 2134 PROPERTIES

PROPERTY	VALUE
Product Type	Double coated
Backing Type	PE foam
Adhesive Type	Modified acrylic
Color	Black
Liner Type	Bi-siliconized PP film
Liner Color	Blue
Backing Thickness	0,8 mm
Total Thickness	0,9 mm
Peel Adhesion at 90° On Steel	9.00 N/cm
Rolling Ball Tack	< 10 cm
Static Shear	168 hrs
Short Time Temperature Resistance	120 °C
Temperature Resistance	-30°C/+90 °C
Shelf Life	12 months
Standard Length	66 m
Standard Width	1220 mm

**International harmonized test methods: ASTM D-1000, PSTC, EN 60454-2.*

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain products for all intended uses and that the materials to be used comply with all applicable regulatory requirements. Saint-Gobain assumes no responsibility for any product failures that occur due to your actions or inactions, including your use, design, fabrication or application of the products into which the materials are incorporated.

SAINT-GOBAIN

TAPE SOLUTIONS
North America | South America
Europe | Asia
For more information, please visit
tapesolutions.saint-gobain.com

WARRANTY: This document should not be considered a warranty or a guarantee. The descriptions of the Product provided hereinabove may vary based on specifications requested and testing protocols. Typically, Saint-Gobain warrants that product(s) will meet mutually agreed specifications at delivery and Saint-Gobain honors any breach of warranty claims for twelve (12) months from delivery of the products. If a product is determined to be nonconforming with its warranty, Saint-Gobain's sole obligation is, at its option, to either replace the nonconforming products or reimburse the purchase price for the same. Suggested storage temperature is between 10°C and 30°C with 50% relative humidity.

The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. SAINT-GOBAIN DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR USE.

Form #1672EU | ©Saint-Gobain February 2025 | All the mentioned trademarks are registered trademarks of Saint-Gobain Tape Solutions or affiliates, part of Saint-Gobain group.